

# RS PRO A30 SC

Neutral white white  
EAN 4007841 088347  
Article number 088347



LED

36 years (Ø 4,5h / day)



Settings via App

4000 K

4000K neutral white



high frequency sensor 360°



max. 8 m



IP54



shock proof IK10



2 - 2000 lux



Light source not exchangeable



Control gear not exchangeable

## Function description

Elegant and robust. Sophisticated design for demanding environments: Equipped with a powerful high-frequency sensor and an aluminium chassis that is as attractive as it is robust, the A series is ideal for pergolas or similar applications thanks to its IK10 impact resistance and tested IP54 protection class. In combination with our Connected Lighting System, the luminaires can be controlled using a wireless push-button. Semi-automatic operation, timer functions, the setting of neighbour groups and tracking light can also be implemented quickly and easily using Connected Lighting. Of course, cross-series networking is also possible at any time without any problems. Connection to central battery systems possible.

## Technical specifications

Dimensions (Ø x H)	331 x 69 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bluetooth, App
With remote control	No
Version	Neutral white white
PU1, EAN	4007841088347
Application, place	Indoors
Application, room	corridor / aisle, function room / ancillary room, warehouse, kitchenette, stairwell, changing room, WC / washroom
includes sheet of self-adhesive numbers	No
Installation site	ceiling, wall
Installation	Surface wiring, Ceiling

Photo-cell controller	Yes
Transmitter power	< 1 mW
Luminous flux total product	2745 lm
Total product efficiency	132,6 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable
Functions	Connection to central battery systems, Selecting programmed lighting scenarios, Motions sensor, DIM function, Adjustable fade time when switching on and off, Semi-/ fully automatic, Neighbouring group

# RS PRO A30 SC

Neutral white white  
EAN 4007841 088347  
Article number 088347



## Technical specifications

Impact resistance	IK10
IP-rating	IP54
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	PC, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	4,00 m
HF-system	5,8 GHz
Slave modeselectable	Yes
Detection	also through glass, wood and stud walls
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m <sup>2</sup> )
Reach, tangential	Ø 8 m (50 m <sup>2</sup> )

	function, Encrypted communication, Timer
Twilight setting	2 – 2000 lx
Time setting	10 s – 60 Min.
Basic light level function	Yes
Basic light level function time	1-60 min
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Bluetooth Mesh
Lifetime LED according to IEC-62717 (L70)	> 60.000 Std.
Basic light level function in per cent	0 – 100 %
Output	20,7 W
Colour Rendering Index CRI	= 80
Angle of aperture	160 °
IP-rating, ceiling	IP54
Detection angle	360 °
Product category	Sensor-switched LED indoor light

## Optional system components

EAN 4007841 084653	Wireless push button PB2-Bluetooth
EAN 4007841 084660	Wireless push button PB4-Bluetooth

# RS PRO A30 SC


Neutral white white

EAN 4007841 088347

Article number 088347



## Detection Zone

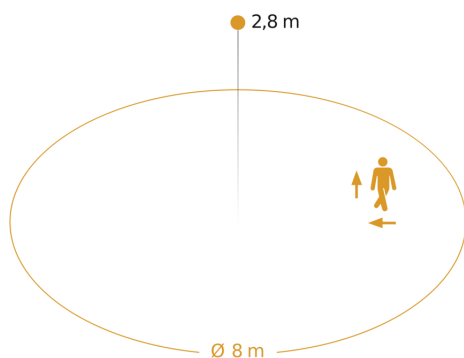

Possible mounting height: 2,00 m – 4,00 m

Orange: radial and tangential

## Dimension Drawing

